

# PCI-9812/9812A/9810

## 4-CH 10/12-Bit 20 MS/s Simultaneous-Sampling Analog Input Cards

### Features

- Supports a 32-bit 3.3 V or 5 V PCI bus
- 12-bit A/D resolution (PCI-9812 and PCI-9812A)
- 10-bit A/D resolution (PCI-9810)
- Up to 20 MS/s simultaneous-sampling rate
- >17 MHz -3 dB bandwidth
- 4-CH single-ended inputs
- Bipolar analog input ranges
- User-selectable input impedance of 50Ω or high input impedance
- On-board 32 k-sample A/D FIFO (PCI-9810 and PCI-9812)
- On-board 128 k-sample A/D FIFO (PCI-9812A)
- Analog and digital triggering
- External clock input for customized conversion rate
- Bus-mastering DMA for analog inputs
- 3-CH TTL digital inputs
- Compact, half-size PCB

### Operating Systems


- Windows 98/NT/2000/XP/2003
- Linux
- DOS

### Recommended Software

- VB/VC++/BCB/Delphi
- DAQBench
- DAQCreator

### Driver Support

- DAQ-LVIEW PnP for LabVIEW
- DAQ-MTLB for MATLAB
- DAQBOY for Windows
- PCIS-DASK for Windows
- PCIS-DASK/X for Linux

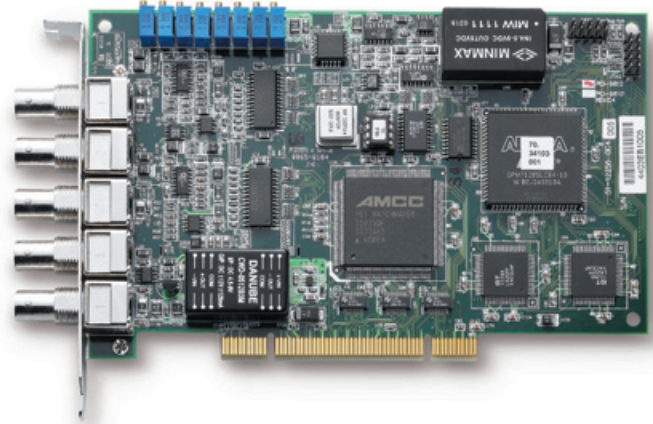


### Introduction

ADLINK PCI-9812, PCI-9810 and PCI-9812A are 4-CH, 10 or 12-bit, 20 MS/s simultaneous-sampling analog input cards. The high-speed analog input channels are single-ended, with hardware programmable input ranges of  $\pm 1$  V,  $\pm 5$  V and input impedances of 50Ω, 1.25 kΩ and 15MΩ. The on-board 32k-sample A/D FIFO can buffer the sampled data. When the data throughput is less than 100 Mbytes/s, the FIFO performs as the temporary A/D sample buffer, and as a rule of thumb, no data loss will happen. When four channels operate at 20 MS/s simultaneously, each sample generates two bytes, resulting in 160 Mbytes/s (4 channels \* 20M \* 2 bytes) throughput, which exceeds the peak 132 Mbyte/s bandwidth of PCI bus. To avoid data loss, the 32k-sample FIFO is the limitation of sample count. For applications needing a larger number of samples at full sampling rate, the PCI-9812A features 128K-sample A/D FIFO for storage.

In addition to the on-board 40MHz time base, users are able to supply the external time base in either sine wave or digital forms. The PCI-9810 and PCI-9812 also feature external digital trigger and programmable analog trigger, thus the conversion start point of multiple cards can be synchronized to external events. The trigger modes include software-trigger, pre-trigger, post-trigger, middle-trigger and delay trigger, further expands the capabilities of these high-speed devices.

ADLINK PCI-9812, PCI-9810 and 9812A deliver cost-effective and reliable data acquisition capabilities and are ideal for vibration testing, image digitizing, ultrasonic measurement, biomedical research, ATE and other high-end Industrial/Scientific/Military applications.

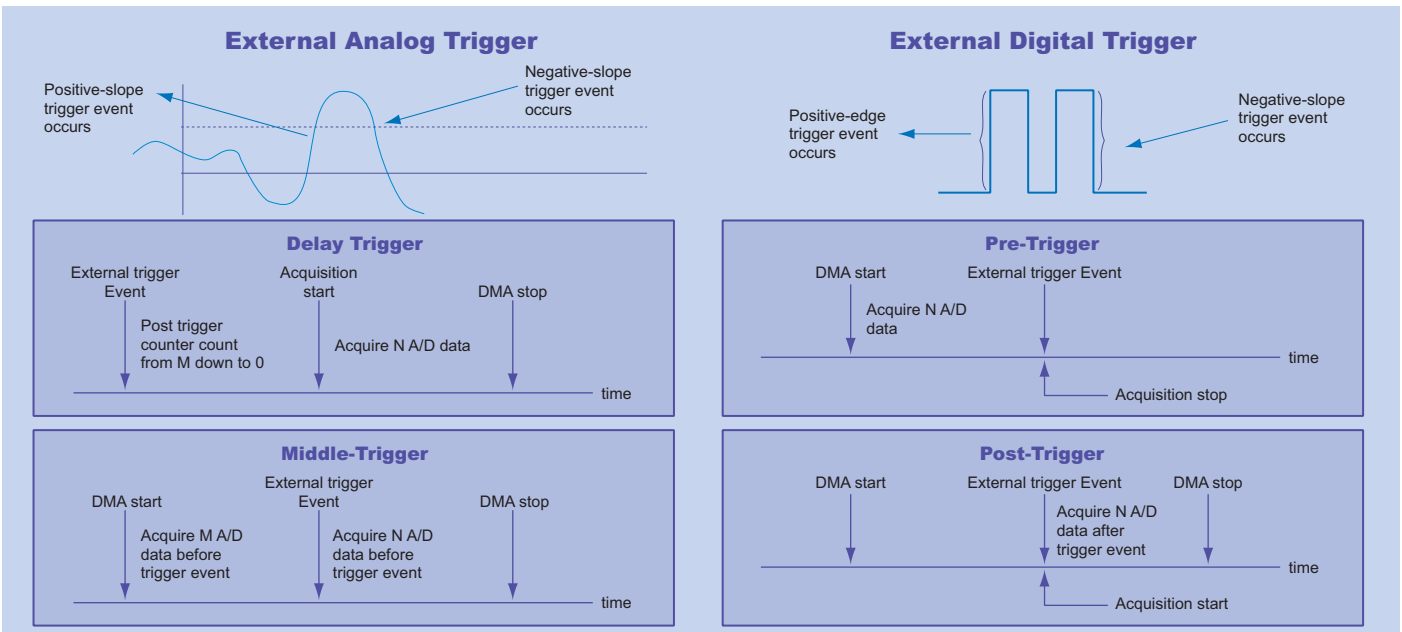

**Specifications**

**Analog Input**

- Number of channels: 4 single-ended
- Resolution
  - 12-bit (PCI-9812 and PCI-9812A)
  - 10-bit (PCI-9810)
- Maximum sampling rate: 20 MS/s
- Input signal ranges, impedance and overvoltage protection

Input Range	Input Impedance	Overvoltage protection
±1 V	50 Ω	±2 V
	15 MΩ	
±5 V	50 Ω	±10 V
	1.25 kΩ	

- Accuracy: ±1.5 % typical
- DNL: ±0.4 LSB typical, ±1.0 LSB maximum
- INL: ±1.9 LSB typical
- Input coupling: DC
- Trigger sources: software, analog and digital trigger (5 V/TTL compatible)
- Trigger modes:
  - software-trigger, pre-trigger, post-trigger, middle-trigger & delay trigger
- FIFO buffer size
  - 32k samples (PCI-9810 & PCI-9812)
  - 128k samples (PCI-9812A)
- Data transfers: bus mastering DMA

**Triggering**

- Analog triggering
  - Modes:
    - pre-trigger, post-trigger, middle-trigger, delay-trigger
  - Source: CH0, CH1, CH2 and CH3
  - Slope: rising/falling
  - Coupling: DC
  - Trigger sensitivity:
    - 256 steps in full-scale voltage range
- Digital triggering
  - Modes:
    - pre-trigger, post-trigger, middle-trigger, delay-trigger
  - Source: external digital trigger
  - Slope: rising edge
  - Compatibility: 5 V/TTL
  - Minimum pulse width: 25 ns

**External Sine Wave Clock**

- Input coupling: AC
- Input impedance: 50Ω
- Input frequency: 300 kHz to 40 MHz
- Input range: 1.0 to 2.0 V<sub>pp</sub>
- Overvoltage protection: 2.5 V<sub>pp</sub>

**External Digital Clock**

- Input coupling: DC
- Input impedance: 50Ω
- Compatibility: 5 V/TTL
- Input frequency: 20 kHz to 40 MHz
- Overvoltage protection:
  - diode clamping, -0.3 V to +5.3 V

**Digital Input**

- Number of channels: 3
- Compatibility:
  - 5 V/TTL with 10 KΩ pull down resistors
- Overvoltage protection:
  - Diode clamping, -0.3 V to +5.3 V
- Data transfers:
  - bus mastering DMA with A/D samples

**General Specifications**

- I/O connector
  - BNC x 5
  - 10-pin ribbon male
- Operating temperature: 0 to 40°C
- Storage temperature: -20 to 70°C
- Relative humidity: 5 to 95 %, noncondensing
- Power requirements

Device	+5 V
PCI-9812	1.4 A typical
PCI-9812A	1 A typical
PCI-9810	1 A typical

- Dimensions (not including connectors)
  - 173 mm x 108 mm

**Pin Assignment**

**J1-J5: Analog Inputs & External Sine Wave Clock**

CH0	1	Shield: GND
CH1	2	Shield: GND
CH2	3	Shield: GND
CH3	4	Shield: GND
Ext. Sine Wave CLK	5	Shield: GND

**Pin Assignment**

**JP1: External Digital Clock, Digital Trigger & Digital Inputs**

Ext. Digital CLK	1	2	GND
Ext. Digital TRIG	3	4	GND
DIO	5	6	GND
DI1	7	8	GND
DI2	9	10	GND

**Ordering Information**

- **PCI-9810**  
4-CH 10-Bit 20 MS/s Simultaneous-Sampling Analog Input Card with 32k-Sample A/D FIFO
- **PCI-9812**  
4-CH 12-Bit 20 MS/s Simultaneous-Sampling Analog Input Card with 32k-Sample A/D FIFO
- **PCI-9812A**  
4-CH 12-Bit 20 MS/s Simultaneous-Sampling Analog Input Card with 128k-Sample A/D FIFO

- 1 Software Solutions
- 2 PXI/CompactPCI Platforms
- 3 PXI-Based Instruments
- 4 PXI/CompactPCI Modules
- 5 PCI DAQ Cards
- 6 PCI DIO Cards
- 7 PCI/104-Plus Products
- 8 ISA DAS/DIO Cards
- 9 Wiring Termination Boards
- 10 Motion Vision & COM
- 11 Remote I/O Modules
- 12 Industrial Computers